


In-Stock Combination Starters

Schaedler Yesco Distribution offers stocked variances of the combination starters which helps **reduce lead times**.

Our **MTO program** (Made-to-Order) allows you to take a current variant and make small adjustments to fit your application.

Customer Specials allows you to create your own version by modifying specified components, wiring (colors, labels), and tags to fit your customer's needs.

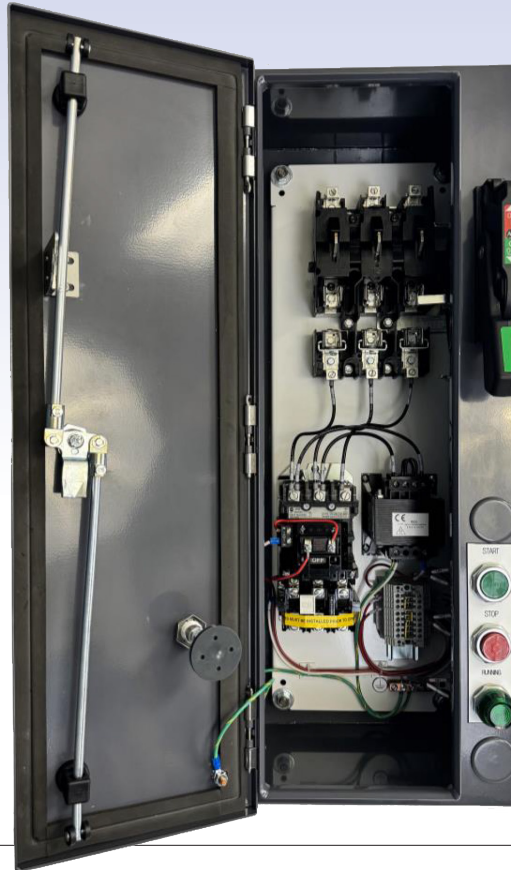

- Provides efficient protection to all applications: pumps, fans, motors, compressors, conveyor systems
- UL508a Rated Combination Starters
- NEMA Size 0-2 Starters
- Fused Disconnect & MCCB Variances
- NEMA 4 & NEMA 4x Enclosures

In-Stock Variances

CSAN0-DN-48TH-SH1GR-CP

NEMA 0 Combi Starter w/ Non-Reversing Fused Disconnect*
Amperage: 18A

CSAN1-DN-48TH-0-SH1GR-CP

NEMA 1 Combi Starter w/ Non-Reversing Fused Disconnect*
Amperage: 30A

CSAN0-CN5-48TH-SH1GR-CP

NEMA 0 Combi Starter w/ Molded Case Circuit Breaker
Amperage: 18A
Motor HP Rating: 5HP

CSAN1-CN10-48TH-0-SH1GR-CP

NEMA 1 Combi Starter w/ Molded Case Circuit Breaker
Amperage: 30A
Motor HP Rating: 10HP



Approvals: (UL508a)



Each Combination Starter Includes:

- Enclosure Size: 27.75" H x 10.5" W x 8.375" D
- Enclosure: Painted Steel 7015 w/ Plastic Handle
- Line Voltage: 480VAC, 3Ph
- Transformer: (80VA)
- Control Voltage: 120VAC
- Eutectic Alloy Overload
- Start / Stop (Green / Red Pushbutton)
- HOA (Hand /Off/Auto Selector Switch)
- Green / Red Pilot lights ("Run" / "Stop")
- 1 NO / 1 NC Auxiliary Contact

* Recommendation: For all fused disconnect versions, use Mersen's Type J – AJT fuses.